


Cartridge Filter Housings

Quick Opening Clamp design, 150 psig



- AMBF offers a full line of **heavy duty** liquid cartridge filter housings with a **quick open clamp design**
- Available in **Carbon, 304 and 316** Stainless Steel Construction
- Standard Sizes to Accommodate Flow Rates from **2 to 500 GPM**
- Housings available in **10, 20, 30 & 40 inch heights**
- All housings are **built in the USA**
- Housings have lid vent, drain ports and gauge ports
- **Connection choices** are NPT Female ports which protect threads during shipping or 150# ANSI flanges
- **Adjustable legs** for easy installation
- All housings have **fully welded Universal base cups** to accept DOE and 222
- All housings have a **universal top seal** plate for cup/spring or fin style tops
- **Epoxy powder coated** to offer a long life
- Housings are rated at 150 PSI inlet pressure at 200°F
- Housings are supplied with a **Buna-N seal**
- 316 SS bottom cups, top cup & springs and V-posts

***Please call with all of your applications
(219) 866-3500***

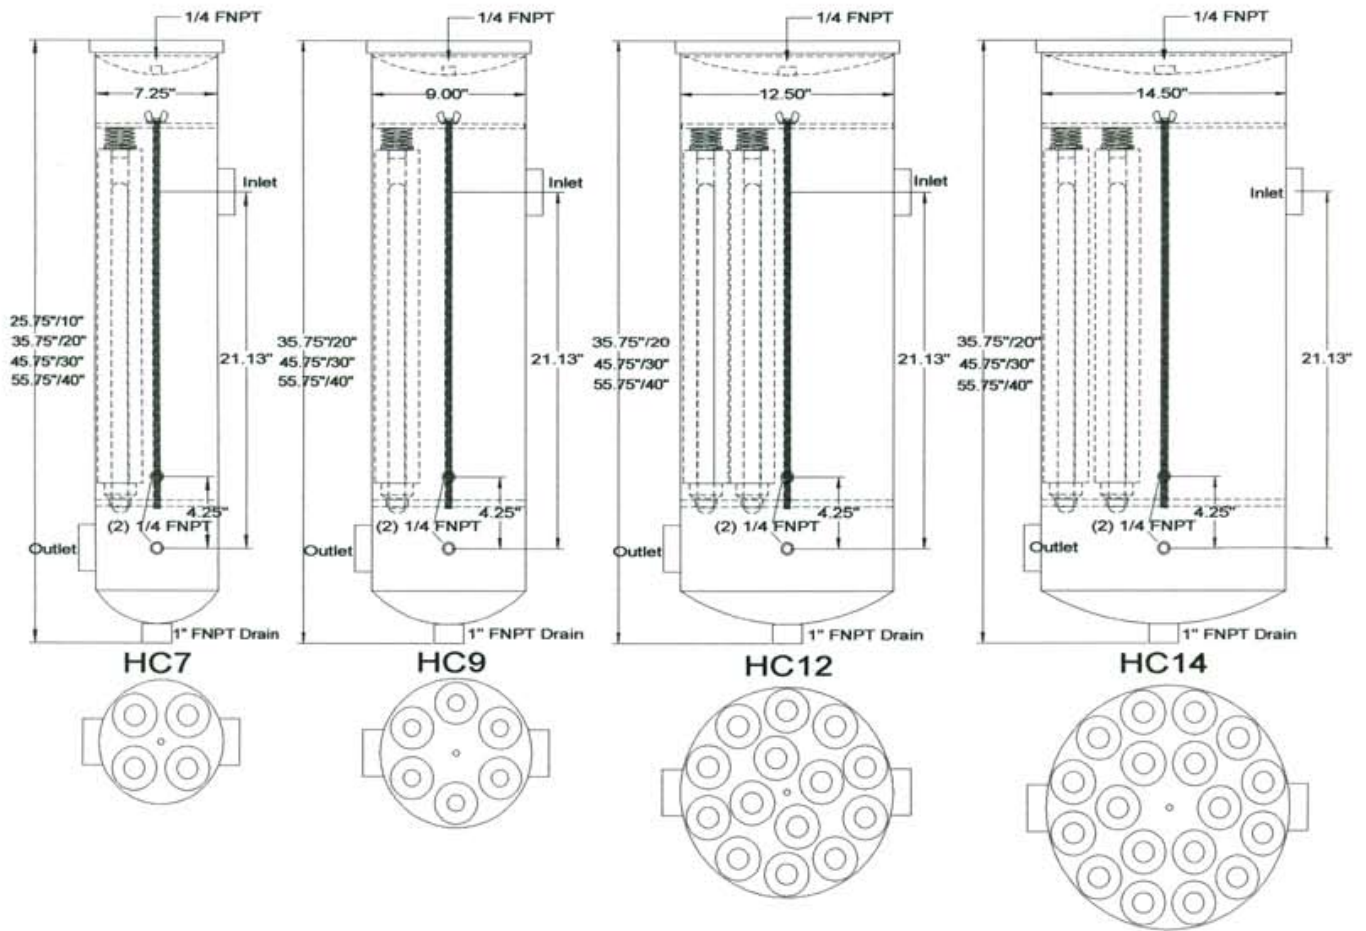

Building a Part Number

MODEL # / HOUSING SIZE	ELEMENTS PER HOUSING	ELEMENT HEIGHT (INCHES)	CONNECTION (INCHES)	TYPE	MATERIAL
HC9	6	30	2	A	C
HC7	4	10, 20, 30 or 40	1, 1.5, 2	A = NPT B = Flange	C = Carbon 4 = 304 SS 6 = 316 SS
HC9	6	20, 30 or 40	2, 3*, 4*		
HC12	14	20, 30 or 40	2, 3*, 4*		
HC14	18	30 or 40	2, 3*, 4*		

* 3" or 4" in flange connection only

1030 E. Elm Street • Rensselaer, IN 47978
 PH (219) 866-3500 • FAX (219) 866-3570

Visit AMBF's website for all of your filtration needs!
www.AmericanMeltBlown.com

